

AXEON

Inline Flow Meters

AXEON Inline Flow Meters have an easy-to-read scale that has been silk-screened on an acrylic body. These flow meters offer durability, accuracy and high quality. **AXEON Inline Flow Meters** are offered in 10, 20, 25, 40, 45, 60 and 70 gallon per minute configurations.

Features


- Solid One Piece Injection Molded Acrylic Body
- Stainless Steel Float and Internals
- Permanent Screen Printed Scales
- Calibrations in GPM and LPM
- Individually Packaged
- 100% Tested for Accuracy

Technical Specifications

- Body: Acrylic
- O-Rings: Silicone
- Connections: Polypropylene
- Guide: 316L Stainless Steel
- Float: 316L Stainless Steel
- Maximum Pressure: 150 psi
- Temperature Rating: 120°F
- Accuracy: $\pm 4\%$



Part Number	Range/Capacity (gpm / lpm)	Connection Size (in)	Dimension	
			A (in / mm)	B (in / mm)
204246	1 - 10 / 4 - 36	1 FNPT	2.00 / 51	10.25 / 260
204271	2 - 20 / 10 - 70	1 FNPT	2.00 / 51	10.25 / 260
208775	5 - 40 / 20 - 150	1 FNPT	3.00 / 76	13.25 / 337
208776	20 - 60 / 80 - 220	1 FNPT	3.00 / 76	13.25 / 337
204272	4 - 40 / 15 - 150	1 1/2 FNPT	2.68 / 68	11.68 / 302
204273	6 - 60 / 20 - 240	1 1/2 FNPT	2.68 / 68	11.68 / 302
210148	20 - 100 / 80 - 360	2 FNPT	2.95 / 75	13.39 / 340
209329*	2.5 - 25 / 10 - 100	1 FNPT	2.83 / 72	13.58 / 345
209365*	2.5 - 25 / 10 - 100	2 FNPT	3.86 / 98	17.32 / 440
209330*	5 - 45 / 20 - 180	2 FNPT	3.86 / 98	17.32 / 440
209030*	7 - 70 / 25 - 250	2 FNPT	3.86 / 98	17.32 / 440

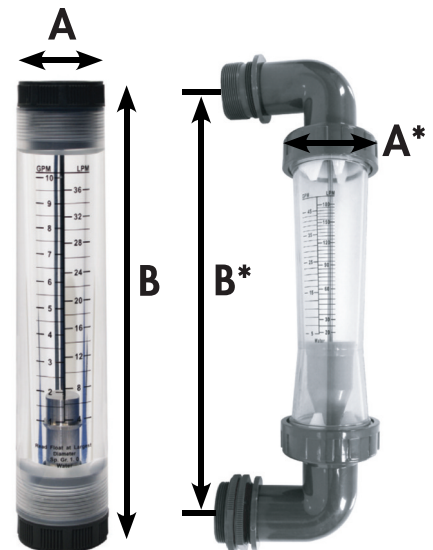

Know Higher Standards™